


Performance – Efficiency and product data

Model	PPF $\mu\text{mol/s}$	Fixture Efficiency $\mu\text{mol/J}$	Input Power (W)	Maximum Current @240V (A)	Supply Frequency (Hz)	Light Angle ($^\circ$)
ATS200 PRO	508	2.5	310	1.35	50/60	120 $^\circ$

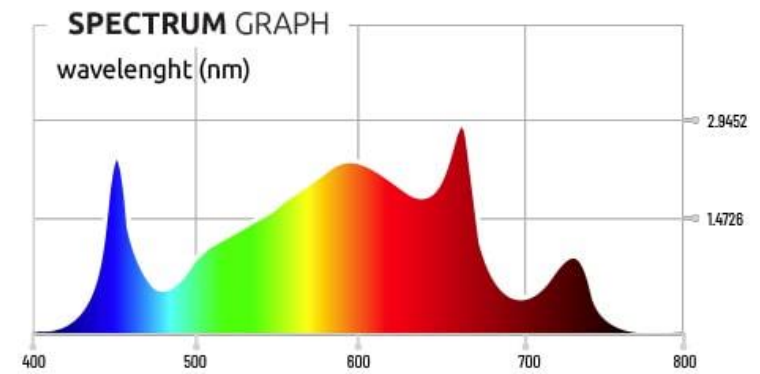

LUMATEK ATS200W PRO LED FEATURES

- High Efficacy 2.5 $\mu\text{mol/J}$
- High PPF output for high intensity 508 $\mu\text{mol/s}$
- High quality Lumatek LED driver
- New Clear Glue protection cover technology on LED bars
- Top bin LEDs
- Balanced full spectrum
- Improved light spread and uniformity
- External control with Lumatek Control Panel Plus 2.0
- Compact design ideal for up to 0,8mx0,8m grow area
- Fully Dimmable
- User friendly Plug & Play Assembling



WEIGHT: 4 Kg

DIMENSIONS: 524.5x524.5x71.6mm

FOOTPRINT: Up to 0.8x0.8m

*Suitable with LUMATEK
Digital Panel PLUS 2.0
(BUY-IN ONLY)*



LUMATEK
PROFESSIONAL LIGHTING