


## Performance – Efficiency and product data

| Model      | PPF $\mu\text{mol/s}$ | Fixture Efficiency $\mu\text{mol/J}$ | Input Power (W) | Maximum Current @240V (A) | Supply Frequency (Hz) | Light Angle ( $^{\circ}$ ) |
|------------|-----------------------|--------------------------------------|-----------------|---------------------------|-----------------------|----------------------------|
| ATS300 PRO | 816                   | 2.7                                  | 310             | 1.35                      | 50/60                 | 120 $^{\circ}$             |

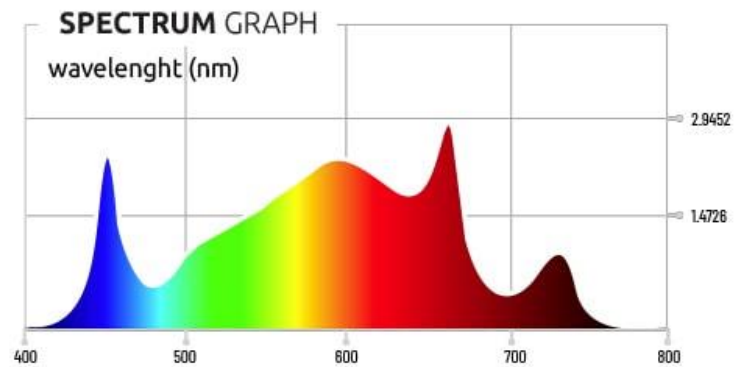

## LUMATEK ATS300W PRO LED FEATURES

- High Efficacy up to 2.7  $\mu\text{mol/J}$
- High PPF output for high intensity 816  $\mu\text{mol/s}$
- High quality Lumatek LED driver
- New Clear Glue protection cover technology on LED bars
- Top bin LEDs
- Balanced full spectrum
- Improved light spread and uniformity
- External control with Lumatek Control Panel Plus 2.0
- Compact design ideal for up to 1m x 1m grow area
- Fully Dimmable
- User friendly Plug & Play Assembling



**WEIGHT:** 5.2 Kg

**DIMENSIONS:** 559.5x559.5x71.6mm

**FOOTPRINT:** Up to 1x1m

*Suitable with LUMATEK  
Digital Panel PLUS 2.0  
(BUY-IN ONLY)*



**LUMATEK**  
PROFESSIONAL LIGHTING