

PRO GROW LED - MODEL X




UL8800 Compliant

SPECIFICATIONS

Light Source	LED
PPF	140 $\mu\text{mol/s}$
Input Power	60W
Efficacy	2.4 $\mu\text{mol/J}$
Input Voltage	Autosensing 100-277V
Fixture Dimensions Weight	87.5cm Lx7.5cm Wx5.8cm H / 2.5kg
Mounting Height	$\geq 15.2\text{cm}$ Above Canopy
Thermal Management	Passive
Beam Angle	100°
Lifetime	50,000hrs
Power Factor	> 90%
Colour Rendering Index	90ra
Ambient Temperature	-40-40°C
Storage Environment	-40°C-85°C RH10%-95%
Chip	Brand LEDs

VOLTAGE	240V
AMPERAGE	0.25A

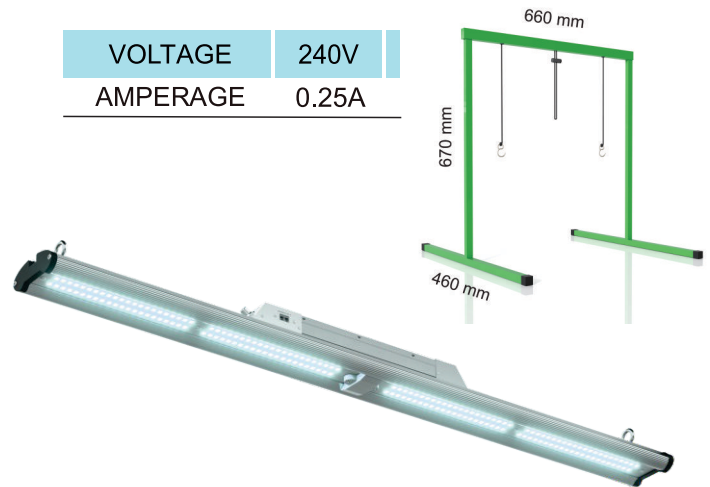

The Pro Grow LED 60 W Model X LED single bar emits 6,500 Kelvin vegetative spectrum with an industry leading CRI of 90. Coupled with ultra-reliable Optimum drivers, these lightweight bars offer cool, fanless & totally silent operation. Extended reliability is assured via IP-55 water resistant, cleanable, 100° clear lenses that protect the diodes from high moisture environments. Compatible light stands are also available if required.



Built-into 60W DRIVER
Manual Dimmer & 0-10V Controllability

